



VHF AIR BAND TRANSCEIVERS

IC-A110 IC-A110EURO



Rugged and reliable for serious ground crew communications

Setting a new standard for ground based communications, the IC-A110 /EURO provide durability and reliability in demanding operational environments.

● **Capable of being installed in any vehicle**

IC-A110/EURO are adaptable to vehicles working on a 12 V, as well as a 24 V power source.

● **Front mounted loud speaker**

A loud speaker mounted in the front of the transceiver is free of any obstacles blocking audio reproduction. And 10 W, of powerful output power is available for the external speaker.

● **Dial selection**

With a simple rotation of the dial, frequently used memory channels, or desired frequency selection can be made.

● **Memory channel name capability**

Up to 7-character memory names can be assigned for each channel. Allows simple and quick channel recognition and selection.

● **Side tone function**

Operator's transmitted messages and calls are audio modulated and can be heard by standard airband headsets*, even in the most demanding operating airport conditions.

*Option OPC-871 is necessary when using standard type headset.

● **Convenient on hook scan functions**

Hanging the microphone on the mic. hanger activates the auto scan function. When released, the transceiver will return to the last used, or priority channel, depending on the selection.

● **Usable in extreme cold**

The adopted LCD guaranteed usable in temperatures from -30°C to $+70^{\circ}\text{C}$ (-22°F to $+158^{\circ}\text{F}$). Normal performance, as well as display indications, are guaranteed even in extremely cold areas.

Icom Inc.

ADDITIONAL FEATURES

- Additional to the predominantly used 25 kHz channel spacing, an extra version complying to new regulations is available for 8.33 kHz channel spacing
- Equipped EEPROM system provides maintenance free memory backup capability, without the use of a separate backup battery
- Various scan functions, such as VFO and priority scans are available
- Limited number of keys for simple manipulation, but providing advanced multi-functions
- A total of 20 memory channels are available
- Ideal compact size of 150(W)×50(H)×180(D) mm* to mount in various types of vehicles
*5²⁹/₃₂(W)×1³¹/₃₂(H)×7³/₃₂(D) in
- 36 W (pep) of powerful output
- Excellent durability to cope with even the toughest workplace
- Memory channel only operation possible via PC programming
- Hand microphone supplied

SPECIFICATIONS

GENERAL

- Frequency range : 118.000–136.975 MHz
- Channel spacing : 8.33/25 kHz auto selection
(according to version) or 25 kHz only
- Mode : 6K00A3E (AM)
- No. of memory Ch. : 20
- Antenna connector : SO-239 (50 Ω)
- Power supply requirement:
(negative ground) 13.75 V DC or 27.5 V DC
- Current drain (at 13.75 V DC):
Transmitting 5.0 A max.
Receiving 4.0 A (at AF max.)
0.5 A (at stand-by)
- Operating temperature range:
IC-A110 –30°C to +60°C
; –22°F to +140°F
IC-A110EURO –20°C to +55°C
- Frequency stability :
IC-A110 ±5 ppm (–30°C to +60°C)
IC-A110EURO ±1 ppm (0°C to +40°C)
- Dimensions : 150(W)×50(H)×180(D) mm
(projections not incl.) 5²⁹/₃₂(W)×1³¹/₃₂(H)×7³/₃₂(D) in
- Weight (approx.) : 1.5 kg; 3 lb 5 oz

Measurements made in accordance with RTCA D0-186a (Class C/E, Class 4/6) or EN 300 676. All stated specifications are and subject to change without notice or obligation.

*These specification items are not available for the IC-A110 due to approval test specifications.

Type approval for the IC-A110/EURO varies between countries. Ask your dealer for availability.

TRANSMITTER

- Output power : 36 W typ. pep (9 W typ. for CW)
- Modulation limiting : 70–100% (IC-A110)
- Modulation compression* : Linear 85%
Max. 95%
- AF harmonic distortion : Less than 10% (at max. mod.)
- Hum and Noise ratio : More than 40 dB
- Spurious emissions :
IC-A110 Less than –16 dBm
IC-A110EURO
9 kHz to 1 GHz Less than –46 dBm
(Less than –36 dBm for harmonics in 30 MHz to 1 GHz range)
1–4 GHz Less than –40 dBm
(Less than –30 dBm for harmonics)
- Adjacent Ch. power* : Less than 60 dB (25 kHz)
Less than 50 dB (8.33 kHz)
- Microphone connector : 8-pin modulator (600 Ω)


RECEIVER

- Receiving system : Double conversion super-heterodyne
- Intermediate freq. : 1st 38.85 MHz
2nd 450 kHz
- Sensitivity (pd) :
IC-A110 Less than 1 μV (at 6 dB S/N)
IC-A110EURO Less than +5 dBμV
(at 12 dB SINAD)
- Squelch sensitivity (pd; at threshold):
IC-A110 Less than 0.3 μV
IC-A110EURO Less than –6 dBμV
- Selectivity :
25 kHz Ch. spacing Less than 6 dB/±8 kHz
More than 40 dB/±17 kHz
More than 60 dB/±25 kHz
8.33 kHz Ch. spacing Less than 6 dB/±2.778 kHz
More than 60 dB/±7.37 kHz
- Spurious response : More than 74 dBμ (IC-A110)
More than 70 dB (IC-A110EURO)
- Intermodulation rejection ratio* :
More than 64 dB
- Blocking/desensitisation* : More than 70 dB
- Cross modulation rejection* :
More than 70 dB
- Audio output power (at 13.75 V; 10% dist.; 60% mod.):
Internal speaker 1.5 W typical w/8 Ω load
External speaker More than 10.0 W w/8 Ω load
Headset (side tone) More than 0.1 W w/500 Ω load
- AF output impedance : EXT SP 8 Ω
Headset (side tone) 500 Ω

Supplied Accessories

- Hand mic. DC power cable Fuses
- Mounting bracket kit Mic. hanger kit

OPTION

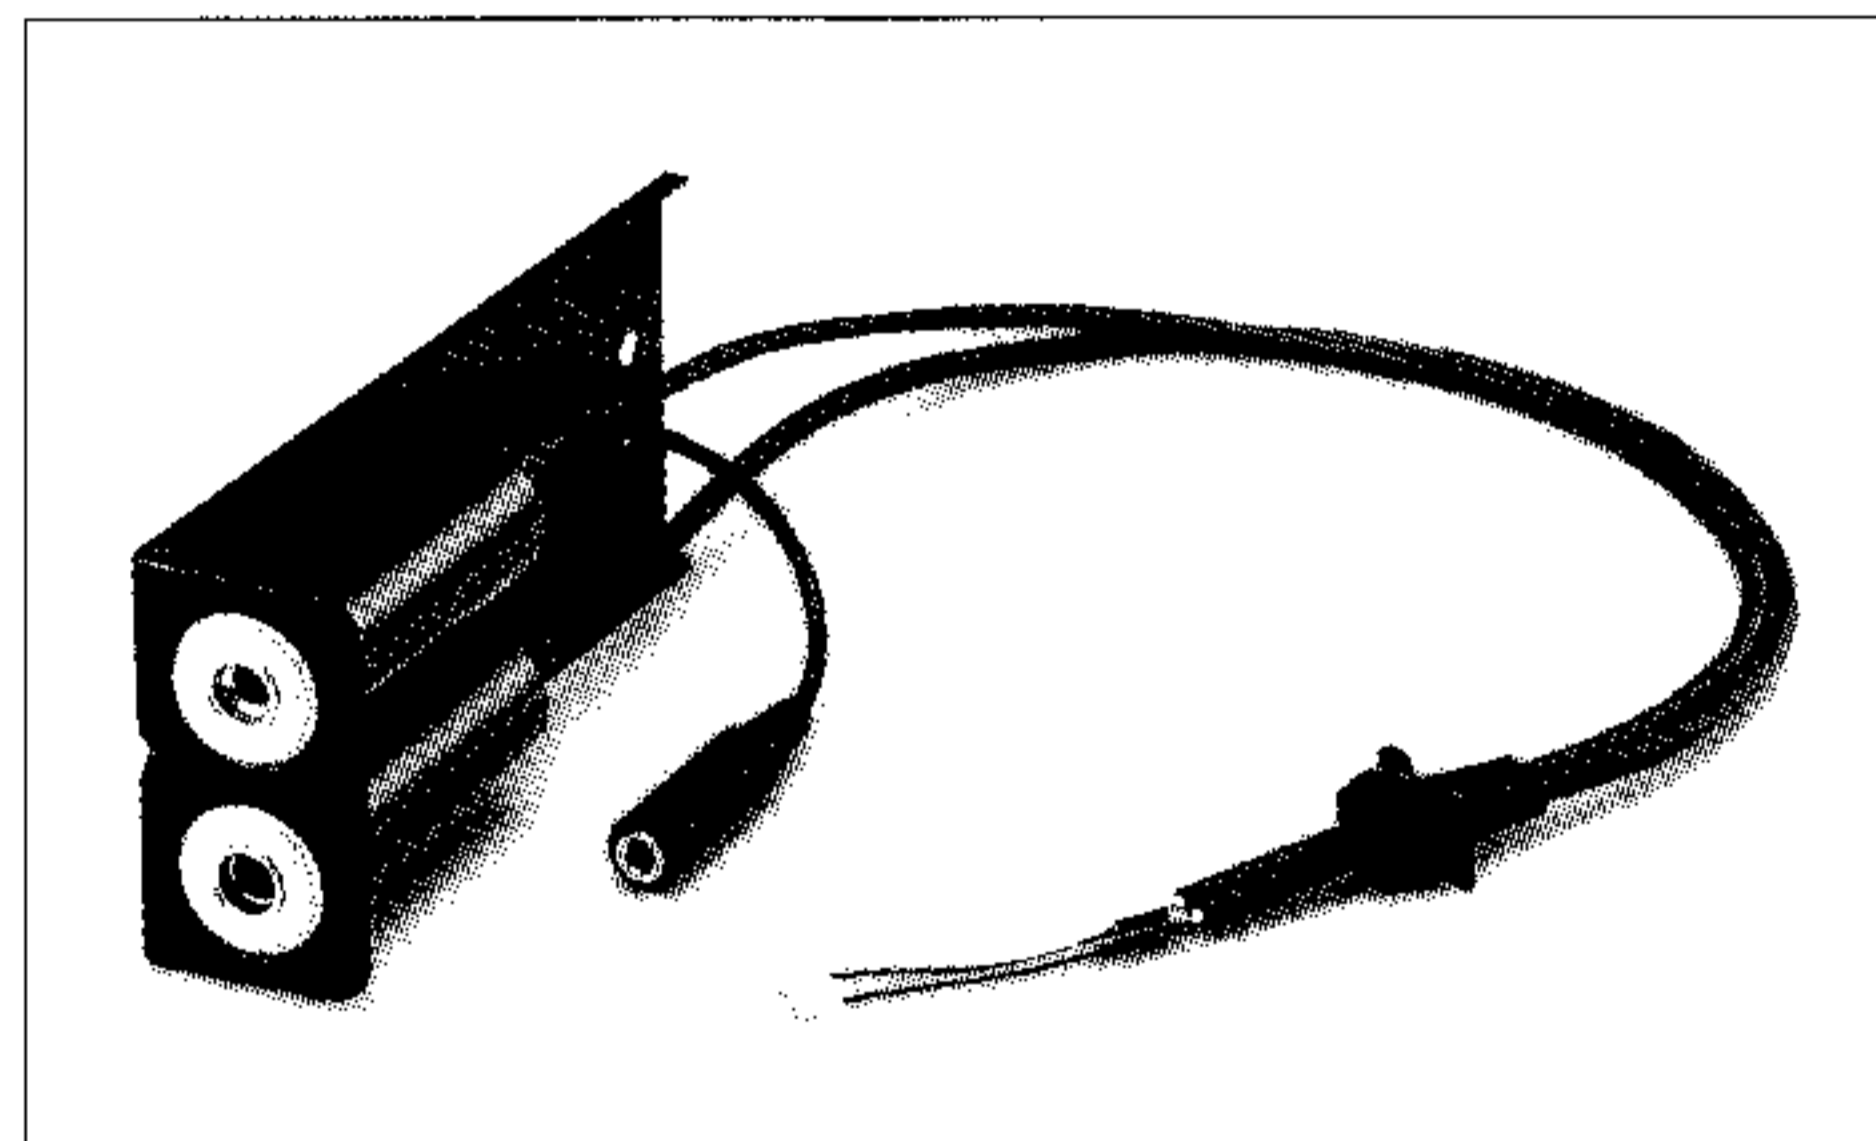

OPC-871
HEADSET ADAPTER
For connection with
standard airband
headset.

Icom Inc.

6-9-16, Kamihigashi, Hirano-ku, Osaka 547-0002, Japan Phone: 06 6793 5302 Fax: 06 6793 0013 URL: <http://www.icom.co.jp/world/index.html>

Count on us!

Icom America Inc.

<Corporate Headquarters>
2380 116th Avenue N.E., Bellevue, WA 98004, U.S.A.
Phone: (425) 454-8155 Fax: (425) 454-1509
URL : <http://www.icomamerica.com>
<Customer Service>
Phone: (425) 454-7619

Icom Canada

3071 #5 Road, Unit 9, Richmond, B.C., V6X 2T4, Canada
Phone: (604) 273-7400 Fax: (604) 273-1900
URL : <http://www.icomcanada.com>

Icom (Australia) Pty. Ltd.

A.C.N. 006 092 575
290-294 Albert Street, Brunswick, Victoria, 3056, Australia
Phone: 03 9387 0666 Fax: 03 9387 0022
URL : <http://www.icom.net.au>

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road, Taipei, Taiwan, R.O.C.
Phone: (02) 2559 1899 Fax: (02) 2559 1874

Icom (Europe) GmbH

Communication Equipment
Himmelgeister Str. 100, D-40225 Düsseldorf, Germany
Phone: 0211 346047 Fax: 0211 333639
URL : <http://www.icomeurope.com>

Icom Spain S.L.

Ctra. de Gracia a Manresa Km. 14,750
08190 Sant Cugat del Valles Barcelona, SPAIN
Phone: (93) 590 26 70 Fax: (93) 589 04 46
URL : <http://www.icomspain.com>

Icom (UK) Ltd.

Unit 9, Sea St., Herne Bay, Kent, CT6 8LD, U.K.
Phone: 01227 741741 Fax: 01227 741742
URL : <http://www.icomuk.co.uk>

Icom France S.a

Zac de la Plaine, Rue Brindejonc des Moulinais
BP 5804, 31505 Toulouse Cedex, France
Phone: 561 36 03 03 Fax: 561 36 03 00
URL : <http://www.icom-france.com>



Certificate Number Q14190

Icom Inc. (Japan), is an
ISO9001 certification
acquired company.

Your local distributor/dealer: